

# 8 by 1 HDMI V1.3 Switcher with CEC ID# 737



Operation Manual

## Introduction

This is a high performance HDMI switcher that allows for various HDMI sources to share one HDTV display. This device features CEC control functions and supports deep color, xvYCC and RS-232 control. Simply press one button select your desired HDMI source to display on the HDTV or use remote control to control your sources from a distance. Switching from one HDMI input source to another will no longer be an inconvenience.

## Applications

- Multi-sources with one display
- Showroom display
- Educational presentation


## System Requirements

Input source equipments, output displayer with HDMI cables.

## Features


- HDMI 1.3 and HDCP 1.1 compliant
  - Supports deep color display RGB/YCbCr 4:4:4 24/30/36 bits
  - Supports color space YCbCr 4:2:2 16/20/24 bits
  - Supports high definition audio – Dolby Digital True HD® and DTS-HD®
  - Signal Enhancement feature allows signal quality improvement after long distance transmission
  - HDMI cable distance test with 1080p/8-bit resolution, the input/output can reach up to 15/15 meters. If running at 1080p/12-bit, the input/output can reach at up to 15/6 meters
  - PC resolution supports: VGA, SVGA, XGA, SXGA, and UXGA (1600 x 1200)
- HD resolution supports: 480i ~1080p 50/60 and 1080p 24
- With remote control function
  - Supports RS232 operation
  - Supports CEC control function
  - Supports xvYCC

## Operating Functions and Controls

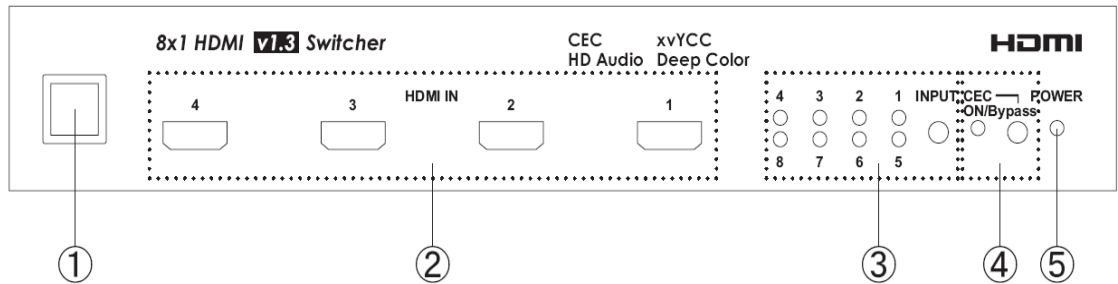

- ① **Remote control sensor.**
  - ② **HDMI IN 1~4:** These slots connect to the HDMI/DVI output ports of your source equipments. ie, set- up-box, DVD or Blue Ray.
  - ③ **Input select indicators:** Press the "INPUT" button repeatedly to switch to your desired input source. The LED that illuminates indicate the corresponding input source is selected.
  - ④ **CEC button indicator:** When the LED illuminate it means CEC is ON. Press again to switch CEC to bypass mode and the LED will not illuminate which means the CEC function will be terminate.
- Note:** Both input source and output display must support CEC function for the switcher to properly perform CEC.
- ⑤ **POWER indicator:** When power is connected to the device, the device automatically turns on and the power LED will turn red.
- Note:** To turn ON or switch the device to standby mode, please press the "POWER" button on the remote control unit.

## Rear Panel

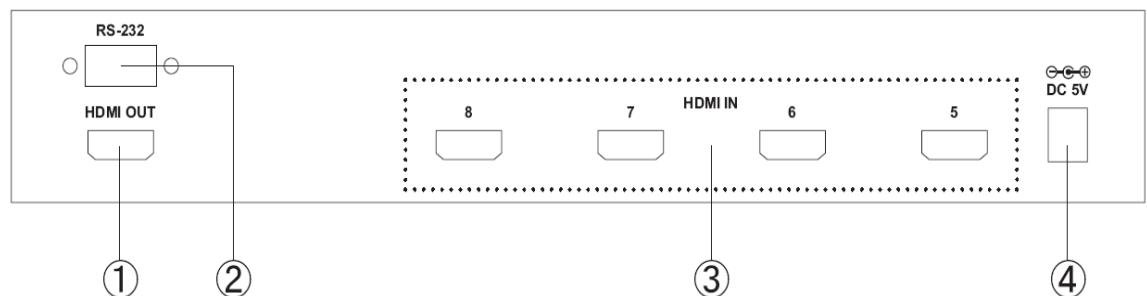


- ① **HDMI OUT:** This is the slot where you connect the HDMI output of the switcher to the HDMI input of your display using a HDMI cable.
- ② **RS-232 input:** When doing firmware upgrade and/or PC remote system control, connect a D-sub 9 pin cable from this RS232 slot to your computer.
- ③ **HDMI IN 5~8:** These slots connect to the HDMI/DVI output ports of your source equipments. ie, set- up-box, DVD or Blue Ray.
- ④ **DC 5V:** Connect the 5V DC power adaptor into this slot and plug the adaptor to an AC wall outlet.

## Remote Control

① **Power:** This button turns on the unit or set the device to standby mode.

② **CEC:** This button turns on the CEC function of the unit or set it to bypass mode. Please refer to section 6.1 for more details.

③ **Input selector:** Buttons 1~6 to select the desired input sources. Buttons 7~8 do not functioning for this model.

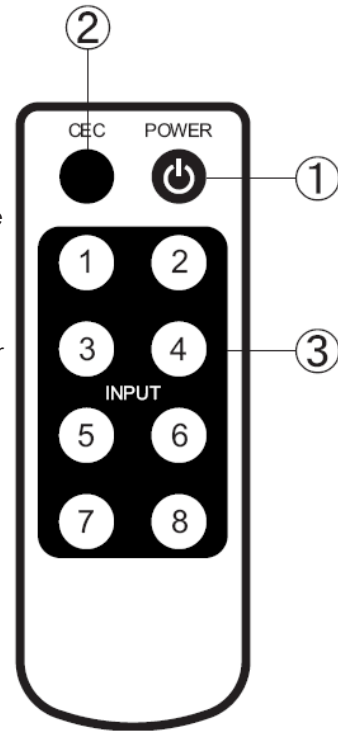

## RS-232 Protocol Pin Definitions

Switcher			Remote Controller	
PIN	Assignment		PIN	Assignment
1	NC	→	1	NC
2	TxD	←	2	RxD
3	RxD		3	TxD
4	NC		4	NC
5	GND		5	GND
6	NC		6	NC
7	NC		7	NC
8	NC		8	NC
9	NC		9	NC

Baud Rate: 19200 bps

Data Bit: 8 bits

Parity: None

Stop Bit: 1 bit

Flow Chart: None



### RS-232 Command

Command Code	Function
"1" + "1"	PORT 1 ON
"1" + "2"	PORT 2 ON
"1" + "3"	PORT 3 ON
"1" + "4"	PORT 4 ON
"1" + "5"	PORT 5 ON
"1" + "6"	PORT 6 ON
"C" + "1"	CEC ON
"C" + "0"	CEC OFF
"P" + "1"	POWER ON
"P" + "0"	POWER OFF
"S"	REPORT STATE

**Note:**

1. The command is combined with a characters and digits.
2. This combination command code has to be separated by ASCII character SPACE.
3. The command will be executed after ASCII character "CR" input.
4. After ASCII character "CR" is entered, if the command is legal the unit will reply "OK" message .
5. If the command is illegal, the unit will reply "NG" message.

# Connection

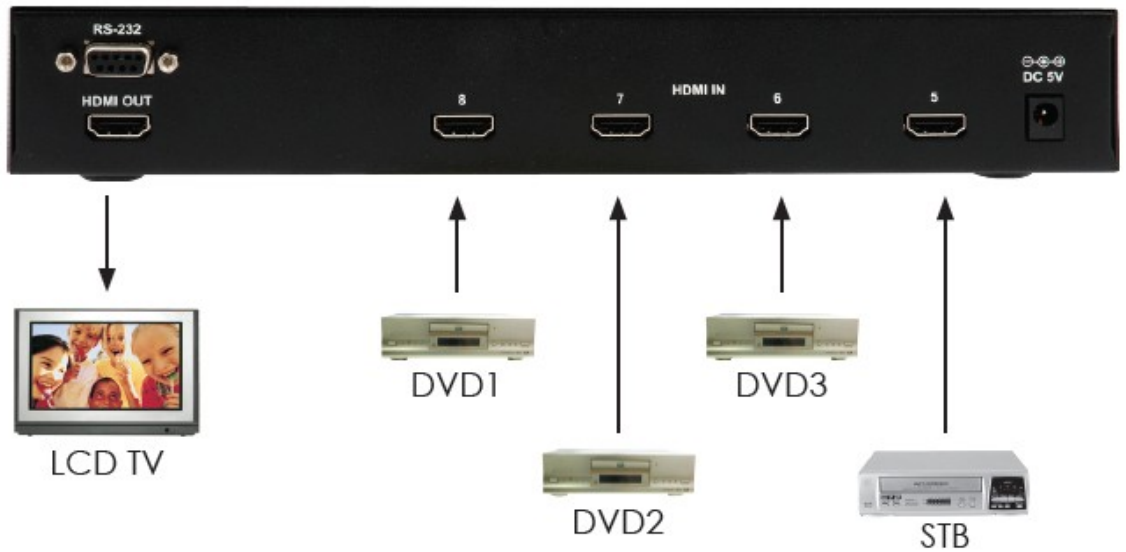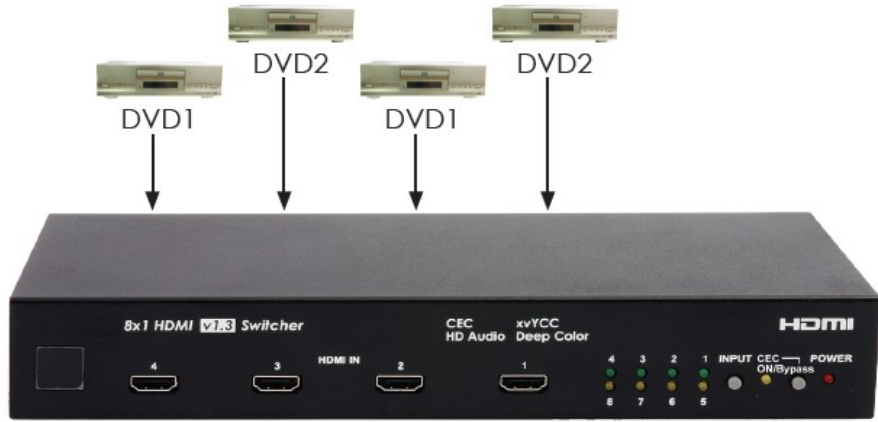

## Specifications

<b>Frequency Bandwidth</b>	2.25Gbps(single link)
<b>Input Ports</b>	8 x HDMI female ports (Type A connector)
<b>Output Ports</b>	1 x RS232 1 x HDMI female port (single link)
<b>Color Space</b>	YCbCr 4:2:2 16/20/24 bits
<b>Deep Color</b>	RGB / YCbCr 4:4:4 24/30/36 bits
<b>ESD Protection</b>	Human body model: $\pm 10\text{kV}$ (air-gap discharge) $\pm 6\text{kV}$ (contact discharge)
<b>Input TMDS signal</b>	1.2 Volts (peak-to-peak)
<b>Input DDC signal</b>	5 Volts (peak-to-peak, TTL)
<b>Power Supply</b>	5V/1A
<b>Weight(g)</b>	850
<b>Dimensions(mm)</b>	280(W) x 104(D) x 44(H)
<b>Chassis Material</b>	Metal
<b>Silkscreen Color</b>	Black
<b>Operating Temperature</b>	0°C~40°C / 32°F ~ 104°F
<b>Storage Temperature</b>	-20°C~60°C / -4°F ~ 140°F
<b>Relative Humidity</b>	20%~90% RH (non-condensing)
<b>Power Consumption</b>	4.1W