



Multisystem Converter

Operation Manual

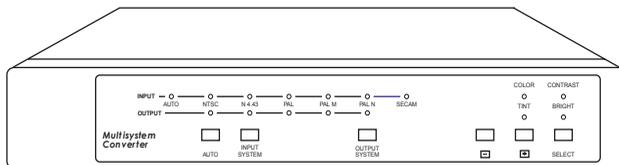

Standard Unit

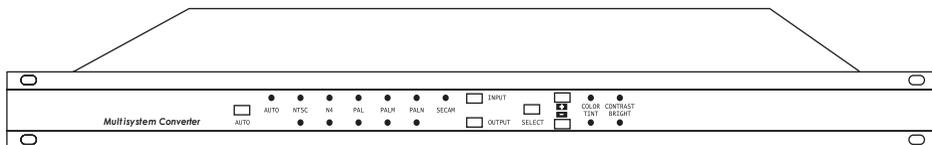

19" Rack Mounted

Precautions

1. Do not expose this product to direct sunlight.
2. Keep the unit away from radiator, heat sources and magnetic field.
3. Do not place it in very dusty or humid locations.
4. Use this unit in a horizontal position only.
5. Do not put heavy object on top of the converter.
6. Put the unit in an open space that has a good ventilation.
7. Keep the unit away from TV or other electronic equipment if the unit is affected.
8. Unplug the unit from the power supply when it is not to be used for a long period of time.


Features

1. Convert any video system to any other video systems.
2. Input video system auto detected.
3. Digital conversion from input TV signals of NTSC 3.58, NTSC 4.43, PAL, PAL M, PAL N, SECAM to output signals of NTSC 3.58, NTSC 4.43, PAL, PAL M, PAL N.
4. 8 bit broadcast quality color decoding.
5. Digital comb filter for input system decoding.
6. Built-in Time Base Correction(T.B.C.) function for signal synchronization.
7. Built-in Automatic Gain Control(A.G.C.) function ensures 1 Vp-p output signal (Input level can range from 0.5Vp-p to 2 Vp-p).
8. Full digital decoding and encoding; highly integrated digital processing reduces the board size and ensures reliable quality.
9. A color-bar pattern will automatically appear on TV screen when there is no video signal present on the input.
10. TBC is active constantly, even in the bypass mode.
11. Adjustable control on Contrast, Brightness, Color, and Tint.


Operation Controls and Functions

Front Panel

Standard Unit

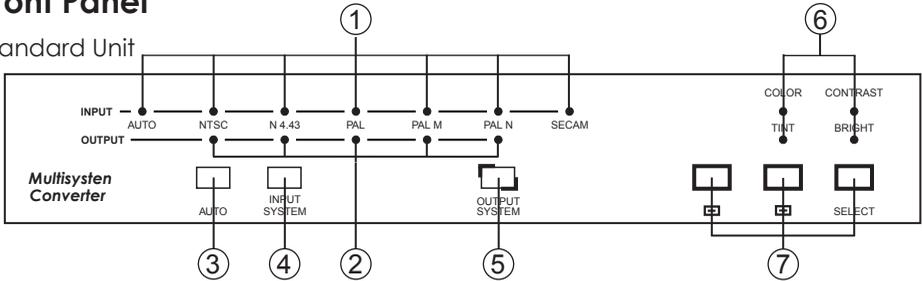

19" Rack Mounted

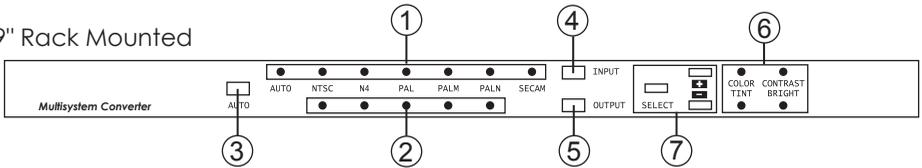

1. Input video system indicator:

AUTO, N3, N4, PAL, PAL M, PAL N, SECAM

1. Illuminates when input auto detection mode is selected.
2. Illuminates when input system is set to NTSC 3.58.
3. Illuminates when input system is set to NTSC 4.43.
4. Illuminates when input system is set to PAL (BDGIK).
5. Illuminates when input system is set to PAL M.
6. Illuminates when input system is set to PAL N.
7. Illuminates when input system is set to SECAM.

Note: When in auto detection mode one of the system indicator will also illuminate to show video system of the input.

2. Output video system indicator:

Red LED illuminates when VIDEO mode is selected.


N3, N4, PAL, PAL M, PAL N

1. Illuminates when output system is set to NTSC 3.58.
2. Illuminates when output system is set to NTSC 4.43.
3. Illuminates when output system is set to PAL (BDGIK).
4. Illuminates when output system is set to PAL M.
5. Illuminates when output system is set to PAL N.


Operation Control and Functions

Front Panel

Standard Unit

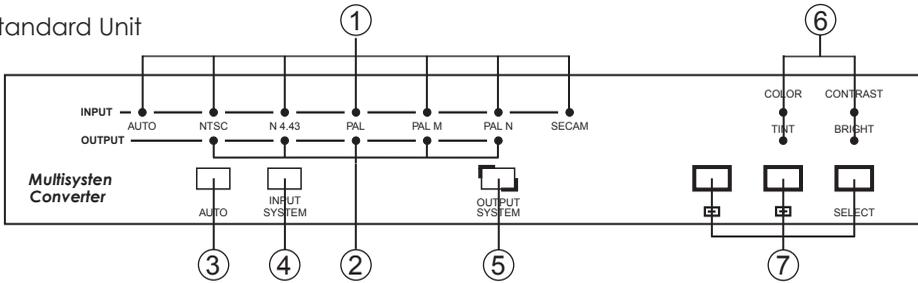

19" Rack Mounted

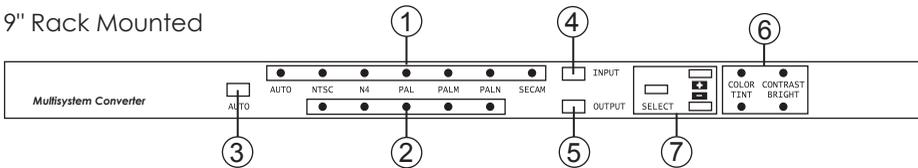

3. Input auto detection button:

Push the button to auto mode, in which the LED lights and the machine will automatically detect the system of the input.

Push the button again to manual mode, in which the LED turned off, and the user has to manually select the input system through input button select.

4. Input system select button:

Each depression of the button step through a series of video system and auto detection mode.

The sequence of selection is as follows:

NTSC 3.58 → NTSC 4.43 → PAL (BDGIK) → PAL M → PAL N → SECAM

5. Output system select button:

In VIDEO mode:

Each depression of the button step through a series of video system and auto detection mode.


The sequence of selection is as follows:

NTSC 3.58 → NTSC 4.43 → PAL (BDGIK) → PAL M → PAL N


Operation Controls and Functions

Front Panel

Standard Unit

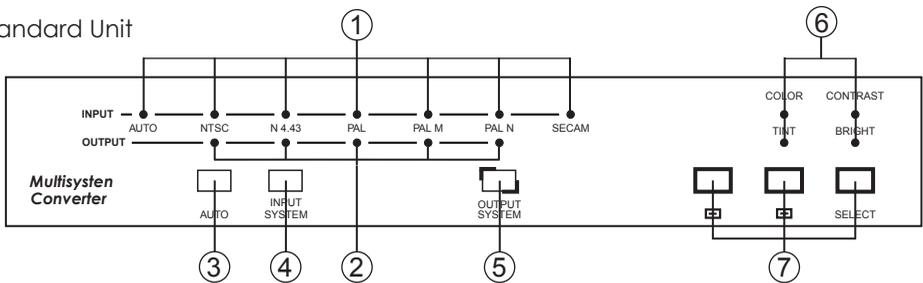

19" Rack Mounted

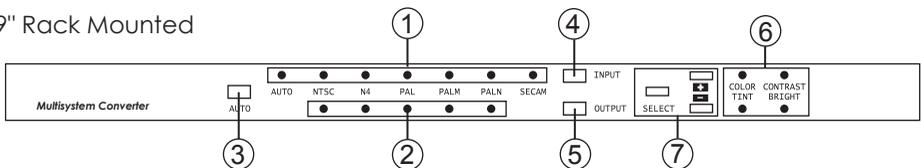

6. Picture adjustment indicators:

1. Contrast indicator:

When it lights up, use \oplus or \ominus button to adjust picture contrast.

2. Brightness indicator:

When it lights up, use \oplus or \ominus button to adjust picture brightness.

3. Color indicator:

When it lights up, use \oplus or \ominus button to adjust picture color.

4. Tint indicator:

When it lights up, use \oplus or \ominus button to adjust picture tint.

7. Picture adjustment controls:

1. Select: Press this button repeatedly to choose what picture adjustment you wish to do.

Each depression of the button will lead to a change on the controls as follows:

Contrast \rightarrow Brightness \rightarrow Color \rightarrow Tint

2. \oplus : Press this button for adding picture effects value.

3. \ominus : Press this button for reducing picture effects value.

4. $\oplus + \ominus$: Press \oplus and \ominus simultaneously, the setting of the selected control will be reset to its default value.

Press \oplus and \ominus simultaneously for over 3 seconds, all controls will be reset to their default values.

Operation Control and Functions

Rear Panel



1. Video input:

Use input selector on the front panel to select the wanted input. S-video has the priority over composite video when both are connected. If S-video is not connected, the composite video will take effect.

2. Video output:

Three different output formats:

1. Composite
2. S-VHS input.

3. DC 15V 450~600mA

4. Power ON/OFF

Specifications

Input systems	NTSC 3.58, NTSC 4.43, PAL, PAL M, PAL N, SECAM
Output systems	NTSC 3.58, NTSC 4.43, PAL, PAL M, PAL N
Connection terminals	Video input: 1 ; S-Video input: 1 Video output: 1 ; S-Video output: 1
Sampling frequency	Y : 13.5 MHz R-Y: 6.75 MHz B-Y: 6.75 MHz
Digital cord bit	Y : 8 bits R-Y: 8 bits B-Y: 8 bits
Line conversion	Video: 526↔ 625 lines
Field conversion	Video: 60↔ 50 fields
Power supply	DC 15V 450~600mA
Dimensions	300(W)x 242(D)x 55(H)mm
Weight	2.0 kgs
Accessory	One RCA cable, One S-VHS cable, One DC Adaptor

Connection and Installation

