

HDMI to 3G SDI Dual Output Converter - ID# 882



Operation Manual

Introduction

The HDMI to 3G SDI Dual Output Converter allows HDMI signals to be shown on two SDI displays while ensuring high bit rates of 2.970 Gbit/s to give you high resolution signals without any loss. For professionals this means that it is now easier to convert your high def HDMI signal with audio to 3G SDI for long distance transmission and display your work on two 3G SDI displays. Also, a 2CH L/R audio input allows DVI signals with 2CH audio to be converted to SDI in order to be shown on SDI displays. Furthermore, the device has a built in default EDID and a recordable EDID that guarantee image display compatibility with the source equipment.

Features

- Supported HDMI timings: 480i, 576i, 720p 50/60, 1080p 24/25, 1080i 50/60, 1080p 50/60
- Operation at 2.970Gbit/s, 2.970/1.001Gbit/s, 1.485Gbit/s, 1.485/1.001Gbit/s and 270Mbits/s
- Simultaneous displays HDMI sources on two SDI displays
- When a DVI signal goes through HDMI, the R/L audio can be sent with it to the 3G SDI output
- Integrated audio embedded up to 8 channel PCM 48kHz for HDMI or 2CH for DVI audio
- Auto video mode detection (3G/HD/SD)
- Connect with other units(CLUX-SDI2HC) to extend your signal over long distances
- Choose between a selectable EDID and recordable EDID
- Supports signal transmission distances of up to 300M for SD signals, 200M for HD signals and 100M for 3G signals
Note: Cable tested with Belden 1694A. Operating distances may vary if used with another type of cable


Applications

- HDMI signal display on SDI display(s)
- Extending HDMI signal over 100M away to two SDI display
- DVI signal with audio display on SDI display(s)
- Cascade HDMI signal over SDI cable

System Requirements


- Input HDMI/DVI (with audio signal) source equipment with connection cable(s).
- Output SDI display(s) or SDI to HDMI converter(s) with connection cable(s).

**Operation Controls
and Functions
Front Panel**

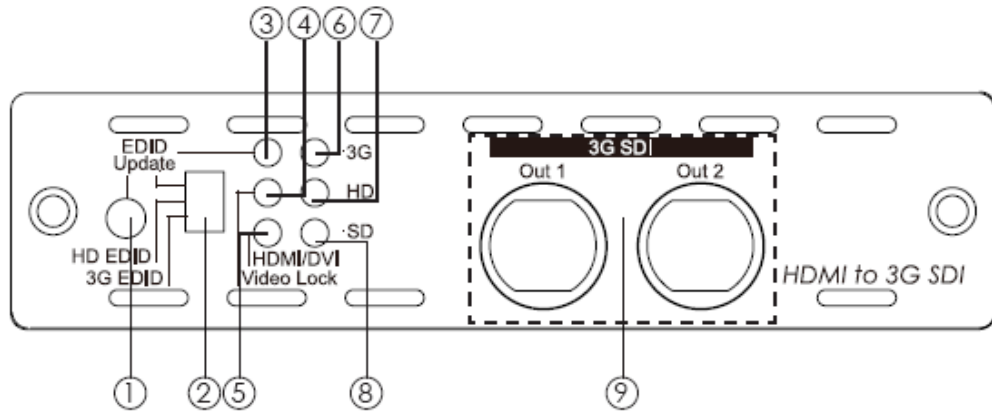


① **EDID Update button:** Use this function only when the image does not display after trying to switch the EDID/HD/3G EDID switch.


EDID procedures as below.

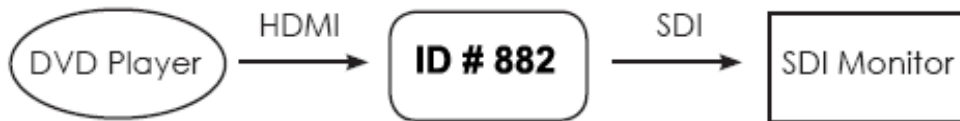


A. Please make sure the DVD is set on "auto mode" in output timing's setting. If the image display properly, stop using this function but if no image display after the connection. go to step B.



B. Connect HDMI source directly (without connecting to CLUX-H2SDI) to HDMI monitor or TV to see if the image display and make sure the source's output timing is supporting SDI or CLUXH2SDI's timing. If yes, go to step C. If no, please change a different monitor or TV and adjust the timing until the image display.

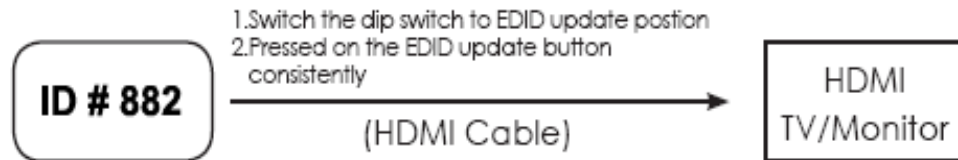

C. Connect the HDMI monitor or TV to the input port of CLUX-H2SDI and then set the dip switch to EDID update position. Press the EDID update button consistently until the Video Lock LED illuminate. In this step the device will updating the monitor/TV's EDID to replace the default setting

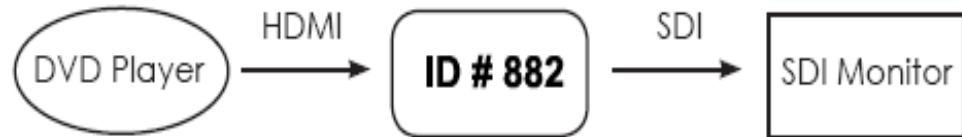

D. Finally, connect the HDMI source to the input port of CLUX-H2SDI and output connect to SDI monitor which should allow image display.

2. EDID Switch: Switching this switch to use the built-in or to update the EDID. Default EDID as below:

3G EDID→Native Mode 1080p@60

HD EDID→Native Mode 1080i@60

EDID update / SD EDID→Native Mode720p@60

3. EDID Update LED: This red LED will illuminate when EDID is being updating. Detail in Section “EDID Update”.

4. Video Lock LED: This yellow LED will illuminate when the input HDMI has received the signal and locked it.

5. HDMI/DVI LED: This green LED will illuminate when the input source is HDMI signal and will not illuminate when the input is DVI signal.


6. 3G LED: This red LED illuminate when the input HDMI signal is 1080p@50/60.

7. HD LED: This yellow LED illuminate when the input HDMI signal is 1080p@24/25/30, 1080i@50/60 or 720p@50/60.

8. SD LED: This green LED illuminate when the input HDMI signal is 480i/576i.

9. 3G SDI Out 1 & 2: Connect output SDI display up to 2 for mirror displays or with SDI to HDMI converter to cascade the signal as long as desired.

Rear Panel

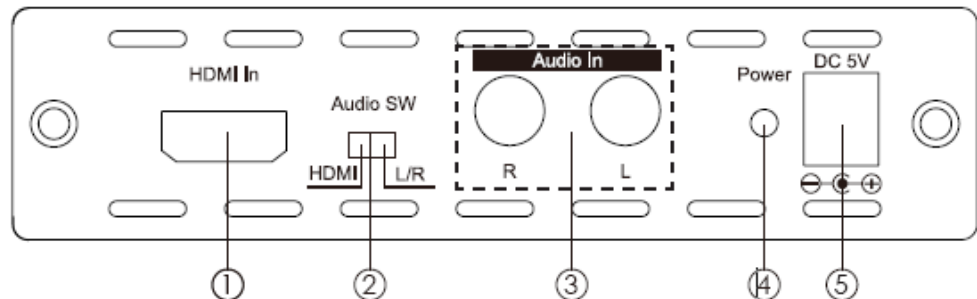

1. HDMI In: This slot is to connect with the input source equipment such as DVD or Blue-Ray player with connection cable for input video and audio signal transmitting. Or it can also be connect with DVI source equipment for video signal transmitting.

2. Audio Switch: Switch this switch to allowing the audio to be send from HDMI or R/L.

3. Audio In R/L: These slots are to connect with audio source equipment such as DVD or Blue-Ray player with output R/L RCA jack.

5. Power LED: This LED will illuminate in RED when the power is connected the AC supply.

6. DC 5V: Plug the 5V DC power supply into this unit and connect the adaptor to AC wall outlet.

LED Signal Chart

| System Operation LED Signal Status | | | | | | | | | |
|------------------------------------|--------|-------------|------------|----|----|--------|-------|------|-------------------------------------|
| No. | EDID | EDID | Signal LED | | | EDID | Video | HDMI | Description |
| | Switch | key | 3G | HD | SD | Update | /Lock | /DVI | |
| 1 | 3G | Not Pressed | ● | • | • | • | ● | ● | Input timing is 3G, HDMI mode |
| 2 | 3G | Not Pressed | • | ● | • | • | ● | ● | Input timing is HD, HDMI mode |
| 3 | 3G | Not Pressed | • | • | ● | • | ● | ● | Input timing is SD, HDMI mode |
| 4 | 3G | Not Pressed | • | • | • | • | ● | ● | Input timing no support , HDMI mode |
| 5 | 3G | Not Pressed | ● | • | • | • | ● | • | Input timing is 3G, DVI mode |
| 6 | 3G | Not Pressed | • | ● | • | • | ● | • | Input timing is HD, DVI mode |
| 7 | 3G | Not Pressed | • | • | ● | • | ● | • | Input timing is SD, DVI mode |
| 8 | 3G | Not Pressed | • | • | • | • | ● | • | Input timing no support , DVI mode |
| 9 | HD | Not Pressed | ● | • | • | • | ● | ● | Input timing is 3G, HDMI mode |
| 10 | HD | Not Pressed | • | ● | • | • | ● | ● | Input timing is HD, HDMI mode |
| 11 | HD | Not Pressed | • | • | ● | • | ● | ● | Input timing is SD, HDMI mode |
| 12 | HD | Not Pressed | • | • | • | • | ● | ● | Input timing no support , HDMI mode |
| 13 | HD | Not Pressed | ● | • | • | • | ● | • | Input timing is 3G, DVI mode |
| 14 | HD | Not Pressed | • | ● | • | • | ● | • | Input timing is HD, DVI mode |
| 15 | HD | Not | • | • | ● | • | ● | • | Input timing is SD, DVI mode |

| | | | | | | | | | |
|----|--------|-------------|---|---|---|---|---|---|-------------------------------------|
| | | Pressed | | | | | | | |
| 16 | HD | Not Pressed | • | • | • | • | ◐ | • | Input timing no support , DVI mode |
| 17 | Update | Not Pressed | ◐ | • | • | • | ◐ | ◐ | Input timing is 3G, HDMI mode |
| 18 | Update | Not Pressed | • | ◐ | • | • | ◐ | ◐ | Input timing is HD, HDMI mode |
| 19 | Update | Not Pressed | • | • | ◐ | • | ◐ | ◐ | Input timing is SD, HDMI mode |
| 20 | Update | Not Pressed | • | • | • | • | ◐ | ◐ | Input timing no support , HDMI mode |
| 21 | Update | Not Pressed | ◐ | • | • | • | ◐ | • | Input timing is 3G, DVI mode |
| 22 | Update | Not Pressed | • | ◐ | • | • | ◐ | • | Input timing is HD, DVI mode |
| 23 | Update | Not Pressed | • | • | ◐ | • | ◐ | • | Input timing is SD, DVI mode |
| 24 | Update | Not Pressed | • | • | • | • | ◐ | • | Input timing no support , DVI mode |
| 25 | Update | Not Pressed | • | • | • | • | • | • | No input signal or No connect |

Note: 1. "◐" signal represent LED illuminate whereas "•" signal represent not.

2. Only a part of HDMI timing may be convert into SDI signal and therefore, default EDID setting selection provides source player with reference and propriety output timing.

3. EDID switch mode / Default EDID setting:

3G → 1080p@60

HD → 1080i@60

Update / SD → 720p@60

4. Due to HDMI's default timing are mainly set on 480p but SDI does not support such timing therefore, it is possible that the image will not display. To avoid such event, it is suggested to set the source input equipment's output timing on the "AUTO mode" for the source equipment to send the EDID native timing of the display.

5. Only No. 4,5,12,16,20 & 24 needs to do EDID update. Detail information please refers to "EDID Update button".

| EDID Update LED Confirm Status | | | | | | | | | |
|--------------------------------|--------|------------|------------|----|----|--------|-------|------|---------------------------------------|
| No. | EDID | EDID | Singal LED | | | EDID | Video | HDMI | Description |
| | Switch | key | 3G | HD | SD | Update | /Lock | /DVI | |
| 1 | Update | Pressed On | ● | • | • | ● | ● | ● | 3G Native, HDMI mode, Read OK |
| 2 | Update | Pressed On | • | ● | • | ● | ● | ● | HD Native, HDMI mode, Read OK |
| 3 | Update | Pressed On | • | • | ● | ● | ● | ● | SD Native, HDMI mode, Read OK |
| 4 | Update | Pressed On | • | • | • | ● | ● | ● | No support timing, HDMI mode, Read OK |
| 5 | Update | Pressed On | ● | • | • | ● | ● | • | 3G Native, DVI mode, Read OK (Note4) |
| 6 | Update | Pressed On | • | ● | • | ● | ● | • | HD Native, DVI mode, Read OK (Note4) |
| 7 | Update | Pressed On | • | • | ● | ● | ● | • | SD Native, DVI mode, Read OK (Note4) |
| 8 | Update | Pressed On | • | • | • | ● | * | • | EDID format error (Note5) |
| 9 | Update | Pressed On | • | • | • | * | • | • | No connection or connection error |

Note: 1. "●" signal represent LED illuminate whereas "•" signal represent not and "*" is blinking light.


2. Only when the EDID button is being pressed on consistently the EDID update will progress and when the update is complete the Video Lock LED will illuminate. If the button is not pressed the LED will illuminate according to "System Operation LED Signal Status".

3. HDMI source sending output resolution is base on receiver side's display monitor/TV's EDID but different sources may have different handling progress. The EDID update function is made to solve compatibility issue.

4. When EDID read DVI mode the system will check if the EDID's native mode support SDI timing. If yes, the display will show according to No. 5,6 & 7. If not, the system will automatically copy default DVI's EDID (Native 3G) mode and show as No.5 Format

5. EDID format error includes: Header error, Checksum error and EDID error under this condition the default EDID or the updated will not be change.

Connection

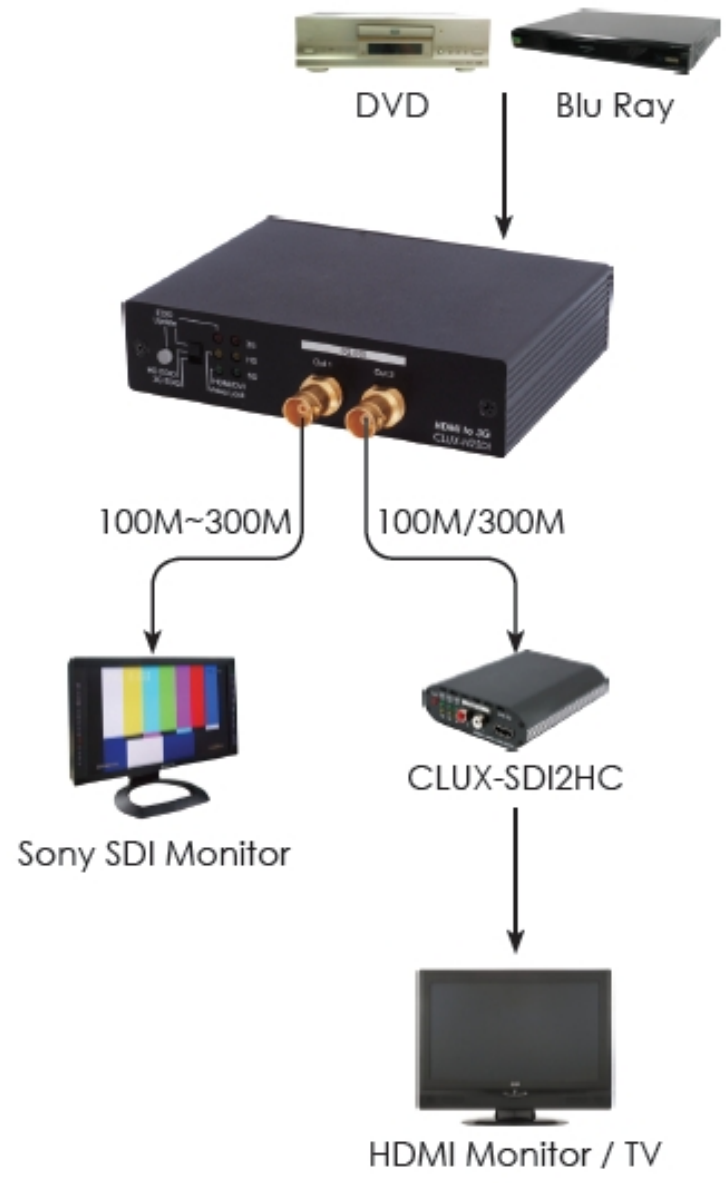

Specifications

| | |
|----------------------------|--|
| SDI Transmission | Rates 2.970 Gbit/s and 2.970/1.001 Gbit/s |
| Frequency bandwidth | 225MHz/link (HDMI 1.3) |
| Input | 1 x HDMI, 1 x R/L (only for DVI input) |
| Output Ports | 2 X BNC (3G-SDI/HD-SDI/SD-SDI) |
| SDI Cable Distance | 3G up to 100M (BELDEN 1649A) HD up to 200M (BELDEN 1649A) SD up to 300M (BELDEN 1649A) |
| ESD Protection | Human body model: +/- 8kV (air gap discharge) +/- 4kV (contact discharge) |
| Operating Temp | 0°C ~40°C/32°F ~104°F |
| Storage Temperature | -20°C ~60°C/-4°F ~140°F |
| Relative Humidity | 20 ~ 90% RH non condensing |