

Multisystem Video Converter/Stabilizer

Ideal for use in video error correction and system conversion


Features:

- * Automatically recognizes TV system of the video input and converts it to NTSC or PAL output.
- * Regenerates sync. (but not frame pulses- not suitable for older television that do not support 50/60 Hz switching) and restored color burst of the Video input to achieve an error-free standard Video output.
- * Ideal for use in video system conversion.
- * Supports composite and S-Video inputs and outputs.

Applications:

Cypress CCR-9 Video Stabilizer/Standards Converters is a simple plug and play unit for systems conversion.

System Configuration

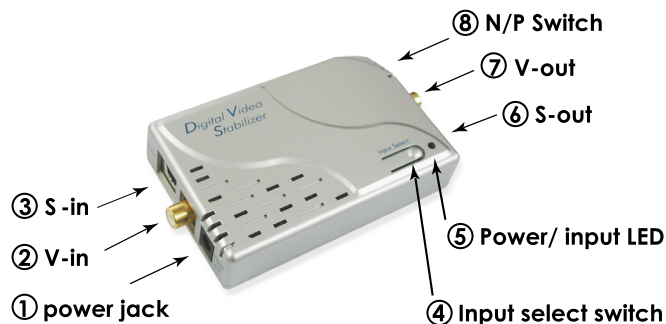

1. **Power Jack:** 7.5V 500mA center positive.
2. **V-in:** Connects to Video output of the source device.
3. **S-in:** Connects to S-Video output of the source device.

4. Input select switch:

Press the button to select composite video or S-Video as input source.

5. Power/ input LED:

When power plug is not connected, LED is OFF.

When power is ON and composite video is selected as input source the LED lights green.

When power is ON and S-Video is selected as input source the LED lights red.

6. S-out:

S-Video output connector connects to TV.

7. V-out:

Composite output connector connects to TV.

8. **N/P switch:** Set to N for NTSC output, Set to PAL for PAL output.

Specification

* Input :

1 x Composite Video RCA Jack 75 ohm 1 Vp-p

1 x S-Video 4-pin mini Din: Y: 1Vp-p 75 ohm.

C: 0.286 Vpp burst signal 75 ohm.

* Output Connector:

1 x Composite Video RCA Jack 75 ohm 1Vp-p

1 x S-Video 4-pin mini Din.

Power: DC 7.5V 500mA

Dimensions: 114(W) x 65(D) x 26(H)mm

Accessory: One set of video cable, one set of adaptor, and User manual.

Weight: 90g