

CLUX-11CA

HDMI Repeater with Audio In

Operation Manual



Disclaimers

The information in this manual has been carefully checked and is believed to be accurate. Cypress Technology assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Cypress Technology assumes no responsibility for any inaccuracies that may be contained in this document. Cypress also makes no commitment to update or to keep current the information contained in this document.

Cypress Technology reserves the right to make improvements to this document and/or product at any time and without notice.

Copyright Notice

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means - electronic, mechanical, magnetic, optical, chemical, manual, or otherwise - without express written permission and consent from Cypress Technology.

© Copyright 2009 by Cypress Technology.

All Rights Reserved.

Version 1.0 October 2009

Trademark Acknowledgments

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

• **Safety Precautions**

Please read all instructions before attempting to unpack or install or operate this equipment, and before connecting the power supply. Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through module openings or empty slots, as you may damage parts.
- Do not attach the power supply cabling to building surfaces.
- Do not allow anything to rest on the power cabling or allow it to be abused by persons walking on it.
- To protect the equipment from overheating, do not block the slots and openings in the module housing that provide ventilation.

• **Revision History**

<u>Version No</u>	<u>Date</u>	<u>Summary of Change</u>
V1	20100826	Preliminary Release

Table of Contents

1. Introduction.....	1
2. Applications.....	1
3. Package Contents	1
4. System Requirements.....	1
5. Features	1
6. Specifications	2
7. Operation Controls and Functions.....	3
7.1 Top Panel	3
7.1 Right Panel.....	3
7.3 Left Panel	4
7.4 Upper Panel.....	4
7.5 Rear Panel	4
8. Connection and Installation	5

1. Introduction

The HDMI repeater with audio in is a device that guaranties your HDMI source display with alternatives selection of audio combination display. The device has optical and R/L audio input including the original HDMI audio signal for user's favorite selection. While displaying the HDMI image, users can now enjoy the display with different type of music. The HDMI repeater with audio in is a brilliant tool for your HDMI entertainment enjoyment.

2. Applications

- Game entertainment
- Product image display
- Demonstration display
- Showroom display

3. Package Contents

- HDMI Repeater with Audio In
- 5V / 1A Power Adaptor
- Operation Manual

4. System Requirements

Input source equipment such as PC or DVD player with connection cables and output HD monitor or LCD TV with HDMI cable.

5. Features


- Compliant with HDMI 1.3, HDCP 1.2 and DVI 1.0
- Supports HDMI Sample Rates up to 192 kHz
- Supports Optical Sample Rate up to 48 kHz
- Supports TMDS clock frequency rate 225MHz
- Supports high-bit-rate (HBR) audio
- HDMI cable distance test with 1080p 8/12bit resolution, the input & output can run up to 10 meters
- Low power consumption
- 24 bit resolution

6. Specifications

Input Port	1 x HDMI, 1 x Optical, 1 x R/L
HDMI Sample Frequency	Up to 192 kHz
Optical Sample Frequency	Up to 48 kHz
Output Port	1 x HDMI
HDMI Audio Format	PCM2/5.1/7.1, Dolby 5.1, DTS 5.1, DD+, D-TrueHD, DTS-HD
Optical Audio Format	PCM2
Power Supply	5V / 1A DC (US/EU standards, CE/FCC/UL certified)
ESD Protection	Human body model: $\pm 8\text{kV}$ (air-gap discharge) $\pm 6\text{kV}$ (contact discharge)
Dimensions(mm)	100 (W) x 70 (D) x 20(H)
Weight(g)	90
Chassis Material	Plastic
Silkscreen Color	White
Operating Temperature	0°C~40°C / 32°F~104°F
Storage Temperature	-20°C~60°C / -4°F~140°F
Power Consumption	1.5W
Relative Humidity	20 ~ 90% RH (non-condensing)


7. Operation Controls and Functions

7.1 Top Panel

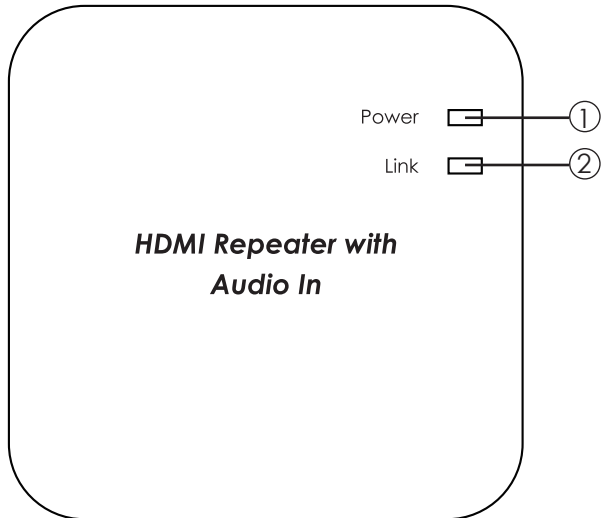


- ①. Power LED: The red LED will illuminate when the power is connected with AC wall outlet.
- ②. LINK: The LED will illuminate in blue when both the source and the display are sync together. This LED will also blink once while the power is turned on.

7.2 Right Panel

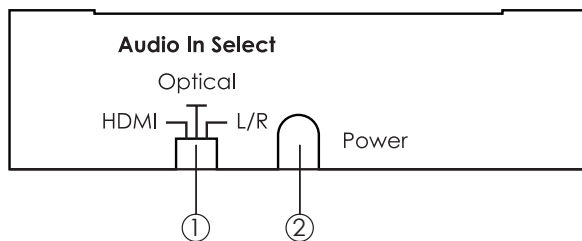


- ①. Audio In Select: This switch allows user to select the audio input from HDMI, Optical or L/R. By switching the dip switch according to the printing from left to right HDMI, Optical and L/R.
- ②. Power Button: Press this button switch ON or set the device to standby mode.

7.3 Left Panel

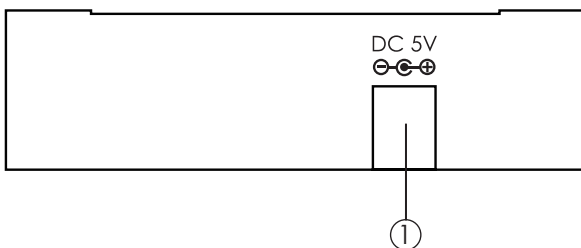


- ①. DC 5V: This slot is where you plug the 5V DC power supply into the unit and connect the adaptor to an AC wall outlet.

7.4 Upper Panel

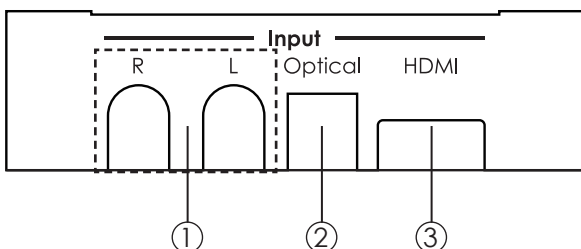


- ①. Input R/L: These slots are to connect with audio source equipment such as CD player or Hi-Fi equipment with RCA jack for input audio signal.
- ②. Input Optical: This slot is to connect with audio source equipment such as stereo system or Hi-Fi equipment with optical cable for input audio signal.
- ③. This slot is to connect with input source equipments such as DVD/Blu-Ray player with HDMI cable for video and audio input signal.

7.5 Rear Panel

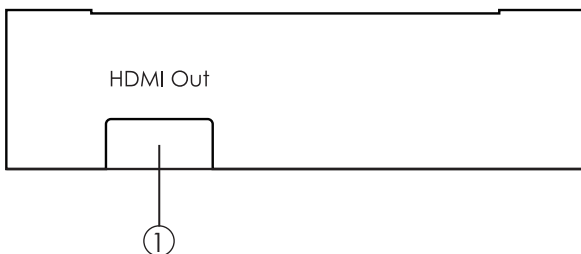

- ①. HDMI Out: This slot is to connect with LCD TV or HD monitor for both video and audio display with HDMI cable.

8. Connection and Installation

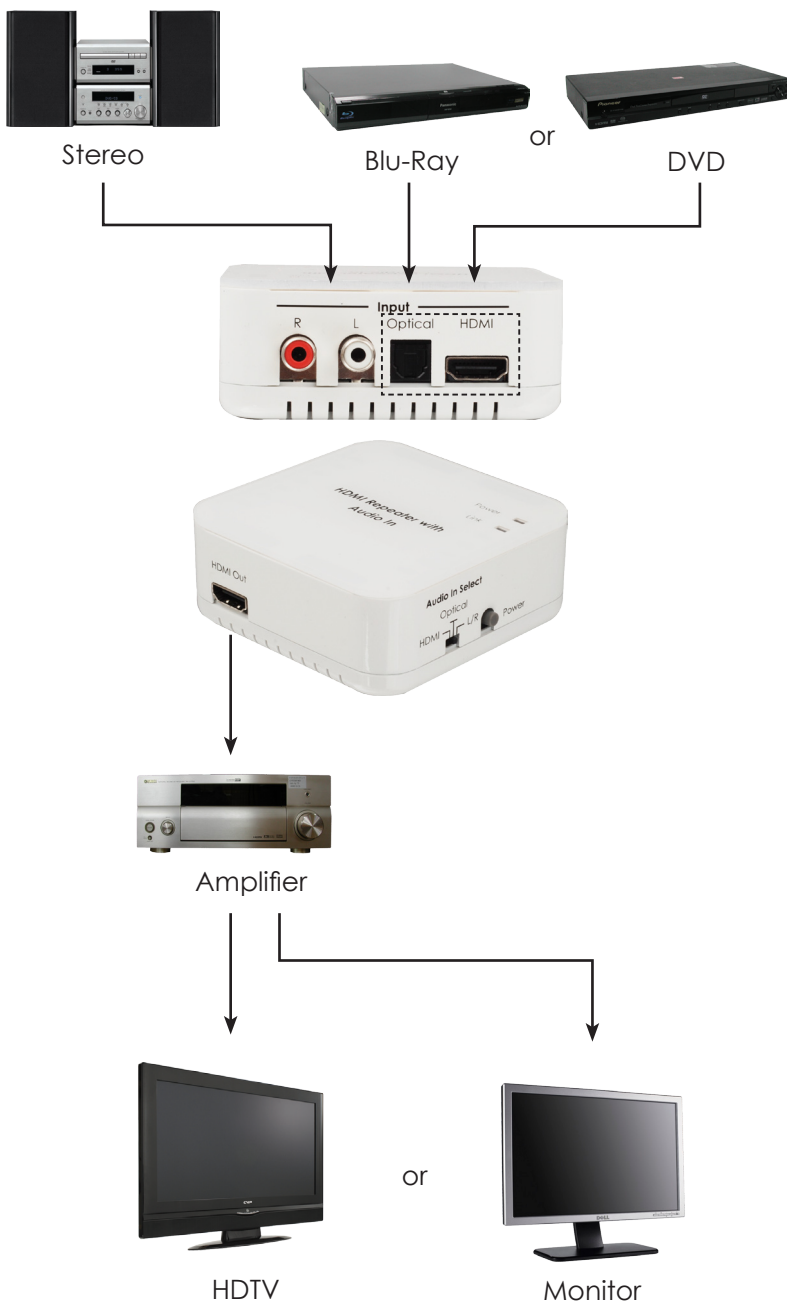



Acronyms

Acronym	Complete Term
DVI	Digital Visual Interface
HDCP	High-bandwidth Digital content protection
HDMI	High-Definition Multimedia Interface



CYPRESS TECHNOLOGY CO., LTD.
Home page: <http://www.cypress.com.tw>

MPM-CLUX11CA