

# Digital Audio Processor

## ID# 695



**Operation Manual**

## Introduction

The Audio Processor is a comprehensive application for your entertainment usage. It allows stereo sound to imitate 5.1CH sound and adjust different sound volume into a balance form to make the listening more enjoyable. With only a pair of L/R input and a pair of L/R output users can set up the surrounding very easily and play the sound directly. Without extra speakers require a theater like sound will be performed.

## System Requirements

Source input (DVD player, PS3, Wii ,...etc.) with L/R RCA cable and L/R RCA cable with output display TV.

## Applications


- Home Theater
- Personal Entertainment
- Cable TV
- Night time entertainment

## Features

- Supports stereo 2 channels input and converts a surround audio signal (5.1 channels) output through L/R jack.
- Supports AST (Adaptive Surround Technology) technology to converts 2 channels audio signal to Virtual 5.1 channels surround sound audio.
- Supports DVX (Virtualizer X) technology for virtual 5.1 channels surround sound audio.
- Supports DBEX (Bandwidth Extender) technology to compensate the low/high frequency and perform it in real environment sound effects.
- Supports DSC (Smart Compression) technology to correct correct some sound effects error.
- Compact size and easy to install.


## Operation Controls and Functions

### Front panel




1. L/R input: Connect L/R stereo analog audio input port to the L/R source equipment, such as DVD player or PS3.

## Rear Panel

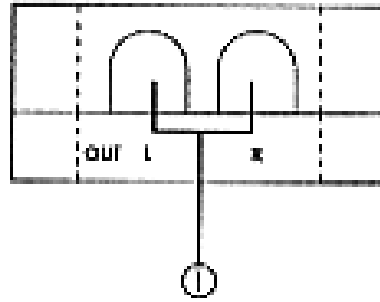


1. L/R output: Connect L/R stereo analog audio output to the display audio input of TV.

## Side Panel

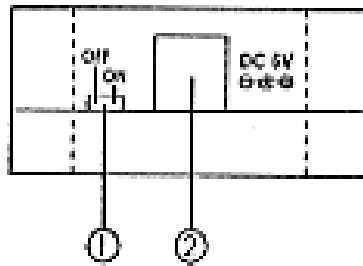

1. On/Off switch: Switch On/Off to enable the stereo sound into 5.1 CH Sound.
2. Power: Plug 5V DC power supply into the unit and connect the adaptor to AC wall outlet.

## Installation

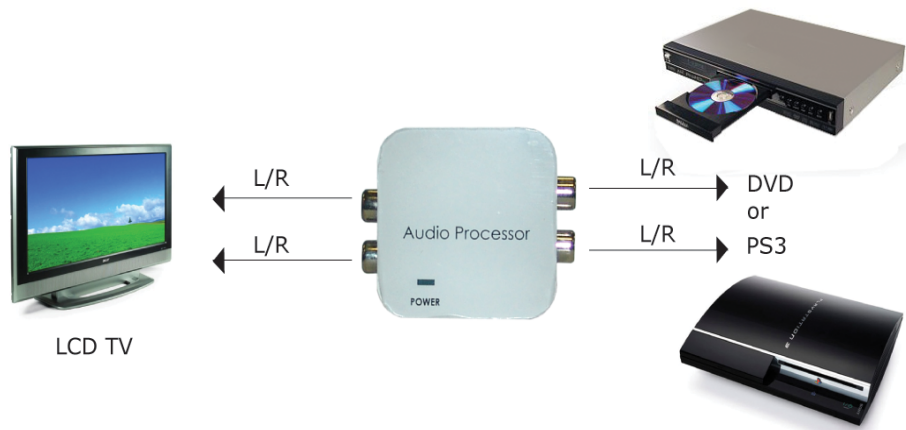

## Specifications

<b>Input Ports</b>	L/R stereo
<b>Input Impedance</b>	6.8K
<b>Output Ports</b>	L/R surround sound
<b>Output Impedance</b>	1K
<b>Power Supply</b>	5V/1 A DC (US/EU standards, CE/FCC/UL certified)
<b>Dimensions (mm)</b>	42(W) x 40.5(D) x 22(H)
<b>Weight(g)</b>	25
<b>Chassis Material</b>	Plastic
<b>Silkscreen Color</b>	White
<b>Operating Temperature</b>	0°C - 40°C
<b>Power Consumption</b>	0.5W